

WATER POLO POOL CERTIFICATE GUIDE

FEBRUARY 2020

BUILDING DRAWING - KEY PLAN POOL DRAWINGS Longitudinal Section Cross Section Floor Plan **BUILDING NAME** SURVEYOR **SIGNATURE** POOL EXPERT SIGNATURE FEDERATION MEMBER **FEDERATION** SIGNATURE POOL No PAGE No DATE

1

FR 7 - POOLS FOR WATER POLO

FR 7 - POOLS FOR WATER POLO

MEASUREMENT CRITERIA

- 1.- The measurements shall be done by a certified surveyor, appointed or approved by the Member in the country in which the pool is situated.
- 2.- The surveying equipment shall be a Total Station. The minimum requirements of the Total Station are the following:
 - Angle Measurement Accuracy Hz and V: 1" (0.3 mgon)
 - Distance Measurement Accuracy: 1mm + 1.5ppm
- 3.- The surveyor shall provide a Calibration Certificate confirming the measurement quality of surveying equipment. The certificate will have a maximum validity of 1 year.
- 4.- All dimensions shall be measured using a mini prism or targets.
- 5.- The depth of the pool shall be measured with the pool empty.
- 6.- All the other measurements shall be measured with the pool full of water.
- 7.- The water temperature shall not be less than 26° plus 1° minus 1° Centigrade.

WATR POLO POOL - GENERAL DIMENSIONS

The sides of the pool shall be orthogonal and form 90 degrees right angle. The tolerance of the angle is $\pm 0.05^{\circ}$. The 2 diagonals shall be the same length. The tolerance of the diagonal is 10mm.

| GENERAL DIMENSIONS | DEGREES / m |
|--------------------|-------------|
| Length 1 | |
| Length 2 | |
| Width 1 | |
| Width 2 | |
| Angle 1 | |
| Angle 2 | |
| Angle 3 | |
| Angle 4 | |
| Diagonal 1 | |
| Diagonal 2 | |

BUILDING NAME


| SURVEYOR | | | | SIGNATURE | |
|-------------------|--|---------|---|-----------|--|
| POOL EXPERT | | | | SIGNATURE | |
| FEDERATION MEMBER | | | | | |
| FEDERATION | | | | SIGNATURE | |
| POOL No | | PAGE No | 2 | DATE | |

FR 7.2 - FIELD OF PLAY

FR 7.2 - The overall Field of Play will be $30.60 \text{m} \times 20.00 \text{m}$ for men and $25.60 \text{m} \times 20.00 \text{m}$ for women.

The distance between respective goal lines shall be 30.00 metres for games played by men and 25.00 metres for games played by women. The anchor point at the edge of the Field of Play shall be placed 30cm behind the front of the goal line. The width of the Field of Play shall be 20.00 metres. The depth of the water shall be consistently not less than 2.00 metres.

| Dimension | MEN | WOMEN |
|-----------|-----|-------|
| A1 | | |
| A2 | | |
| A3 | | |
| A4 | | |
| A5 | | |
| B1 | | |
| B2 | | |
| B3 | | |
| B4 | | |
| B5 | | |
| C1 | | |
| C2 | | |
| С3 | | |
| D1 | | |
| D2 | | |
| D3 | | |

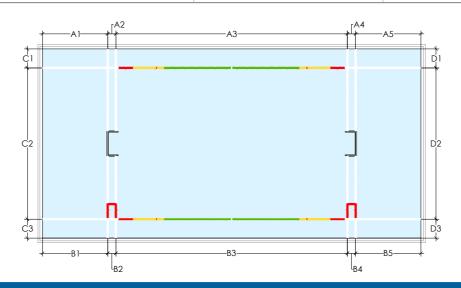

BUILDING NAME

| SURVEYOR | | | | SIGNATURE | |
|-------------------|--|---------|---|-----------|--|
| POOL EXPERT | | | | SIGNATURE | |
| FEDERATION MEMBER | | | | | |
| FEDERATION | | | | SIGNATURE | |
| POOL No | | PAGE No | 3 | DATE | |

FR 7 - POOLS FOR WATER POLO

FR 7.2 - FIELD OF PLAY

| FINA RULE | COMPLIANT | NONCOMPLIANT |
|--|-----------|--------------|
| FR 7.2 - The depth of the water shall be consistently not less than 2.00 metres. | | |

FR 7.3 - WATER TEMPERATURE

| FINA RULE | COMPLIANT | NONCOMPLIANT |
|---|-----------|--------------|
| FR 7.3 - The water temperature shall not be less than 26° plus 1° minus 1° Centigrade | | |

FR 7.4 - LIGHT INTENSITY

| FINA RULE | COMPLIANT | NONCOMPLIANT | NOT ISSUED |
|---|-----------|--------------|------------|
| FR 7.4 - The light intensity shall not be less than 600 lux | | | |

A lighting report shall be issued

FR 7.7 - CEILING HEIGHT FOR INDOOR POOLS

FR 7.7 - Minimum Ceiling heights is not required

| | m |
|----------------|---|
| Ceiling height | |

| CO | N/A | М | н | N. | re. |
|----|-----|---|---|----|-----|
| | | | | | |

BUILDING NAME

| SURVEYOR | | | | SIGNATURE | |
|-------------------|--|---------|---|-----------|--|
| POOL EXPERT | | | | SIGNATURE | |
| FEDERATION MEMBER | | | | | |
| FEDERATION | | | | SIGNATURE | |
| POOL No | | PAGE No | 4 | DATE | |